




Finecorsa meccanici con kit di montaggio Mechanical limit switches with mounting kit

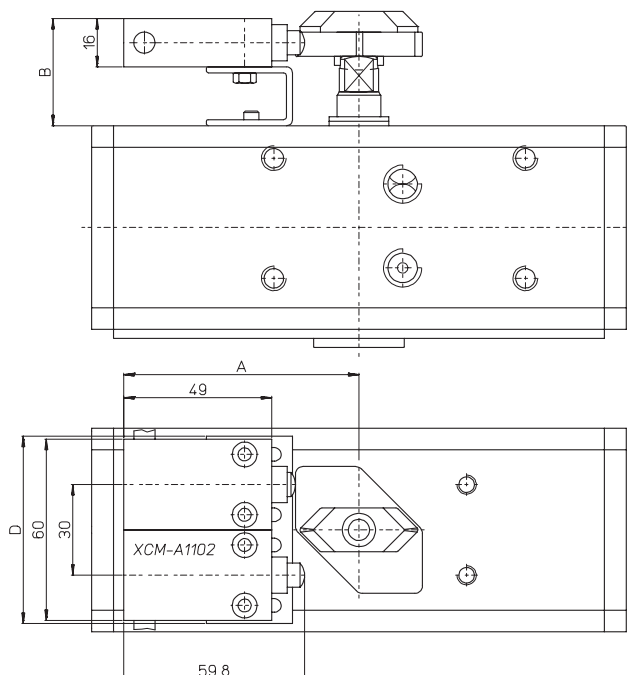

Caratteristiche principali Features

Finecorsa meccanici del tipo a pulsante conformi alle norme:
Macchine: IEC 60947-5-1, EN 60947-5-1, UL 508,
CSA C22-2 n° 14

Prodotti: IEC 60204-1; EN 60204-1

Corpo in tecnopolimero

Grado di protezione IP 65 secondo IEC 60529

Cavo d'uscita flessibile a 4 conduttori (lunghezza 1m)

Temperatura di utilizzo: da -25°C a +70°C

Possono essere montati sui modelli DA e SR tramite un kit composto da una basetta fissata al corpo dell'attuatore e da una camma montata sull'albero dello stesso.

Mechanical, button limit switches as per:

machinery: IEC 60947-5-1, EN 60 947-5-1, UL 508,
CSA C22-2 n° 14

product: EC 60204-1; EN 60204-1

Body in technopolymer

Protection: IP 65 as per IEC 60529

Flexible output cable with 4 conductors (length 1 m)

Working temperature: from -25°C to +70°C

It can be mounted onto DA or SR models using a kit which contains a mounting plate and a cam fixed to the actuator body.

Schema di funzionamento Working plane

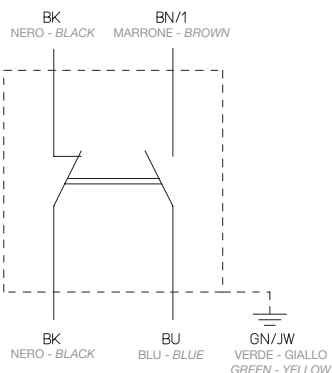


TABELLA DIMENSIONALE DIMENSION TABLE

Attuatore Actuator	DA 15	DA 30	DA 45	DA 60	DA 90	DA 120	DA 180	DA 240	DA 360	DA 480	DA 720	DA 960	DA 1440	DA 1920
Attuatore Actuator	----	SR 15	----	SR 30	SR 45	SR 60	SR 90	SR 120	SR 180	SR 240	SR 360	SR 480	SR 720	SR 960
kit	KBF68015					KBF68060					KBF68960			
kit 1 finecorsa kit 1 limit switch	KFE3A1015					KFE3A1120					KFE3A1720			
kit 2 finecorsa kit 2 limit switch	KFE3A2015					KFE3A2120					KFE3A2720			
A mm.	76					76					86			
B mm.	31					41					41			
C mm.	38					48					48			
D mm.	60					70					70			